Searching PAJ 1/1 Page

PATENT ABSTRACTS OF JAPAN

(11)Publication number: 2003-001878 (43)Date of publication of application: 08.01.2003

(51)Int.Cl. B41J 5/30 G06F 3/12

G06F 15/00 G06K 17/00 G06K 19/00


(21)Application number: 2001–186184 (71)Applicant: FUJI XEROX CO LTD (22)Date of filing: 20.06.2001 (72)Inventor: OTAKE SUSUMU

(54) INFORMATION PROCESSING METHOD, INFORMATION PROCESSING SYSTEM, AND DEVICE USED FOR THE SYSTEM

(57)Abstract:

PROBLEM TO BE SOLVED: To prevent the amount of data stored in a memory card from increasing in an information processing system which inputs and outputs data off-line by utilizing the memory card.

SOLUTION: A server device 40 receives job processing information and a job reservation request from an information processing device 10 and generates job information, correlates the job information with the job processing information, and outputs the job information to the information processing device 10. In the job processing device 10, the job information received from the server device 40 is stored in a memory card 60. When the memory card 60 in which the job information is stored is attached, a job execution direction device 30 directs the job information read from the memory card 60 to start the execution of the job and outputs to the server device 40. When the server device 40 receives the job information and the start direction of job execution from the job information direction device 30, the device executes the job according to the job processing information corresponding to the job information.



(19)日本国特許庁 (JP) (12) 公開特許公報 (A)

(11)特許出願公開番号

特開2003-1878


(P2003-1878A)

(43)公開日 平成15年1月8日(2003.1.8)

(51) Int.Cl. ⁷		識別記号	FΙ			テーマコード(参考)	
B41J	5/30		B41J !	5/30	Z	2 C 0 8 7	
G06F	3/12		G06F	3/12	Е	5 B 0 2 1	
	15/00	3 1 0	1!	5/00	310P	5B035	
G06K	17/00		G06K 1	7/00	L	5B058	
	19/00		19	9/00	Т	5B085	
					請求項の数11	OL (全 15 頁)	
(21)出願番号		特願2001-186184(P2001-186184)	(71)出願人	0000054	000005496		
				富士ゼロ	コックス 株式会社	:	
(22)出顧日		平成13年6月20日(2001.6.20)		東京都洋	售区赤坂二丁目17	番22号	
			(72)発明者 大竹 晋				
				神奈川県	具海老名市本鄉22	74番地 富士ゼロ	
				ックスを	朱式 会 社海老名事	業所内	
			(74)代理人	1000862	98		
				弁理 士	船橋 國則		
						最終頁に続く	

(54) 【発明の名称】 情報処理方法、情報処理システム、並びに当該システムに使用される装置

(57)

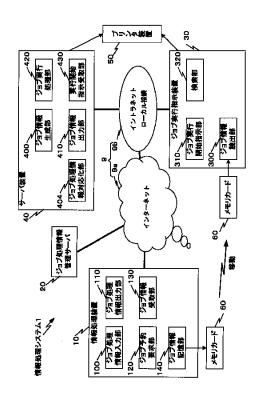

(2) — 2

-

(3) —

_

(4) — 6

10

-

20

- 30

40 —

_ _

(5) — 8

7 8

10

Hypertext Markup Language

20

— Uniform Re source Locators

Extensible 40 —

Markup Language
H Hypertext Transfer Protocol

-

20

_

30

_ _

40 —

(7) 11 12 3 10 Н Н • 20 Н 30 40 •

7

- ·

Н

10

30

-

__

_

- 50

(9) н Н Н Н Н \$

H Service Location Protocol

_


20

30


40


--50



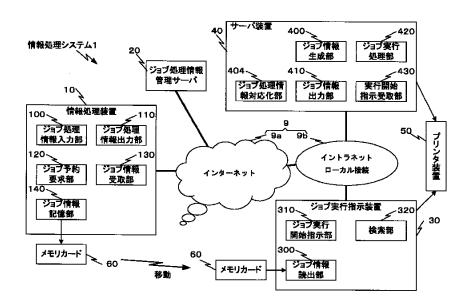


(12)

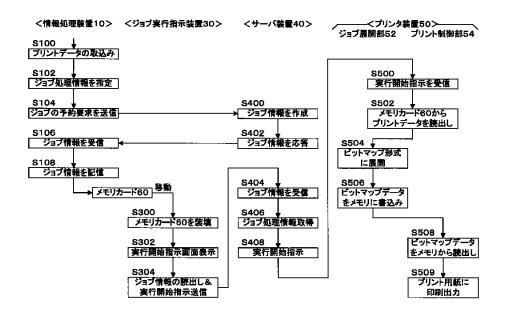


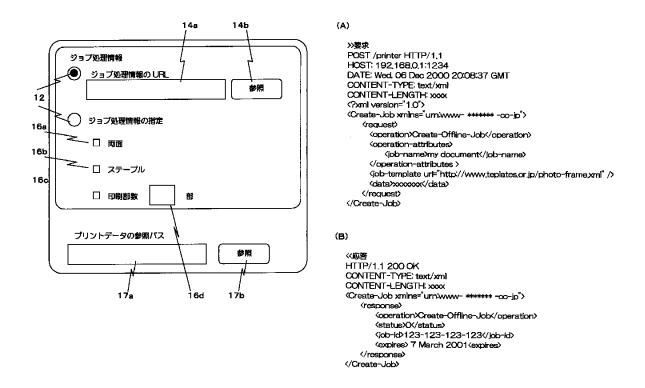

(13)

(A) »要求 POST /printer HTTP/1,1 HOST: 192,168,0,1:1234 DATE: Wed, 06 Dec 2000 20:08:37 GMT CONTENT-TYPE: text/xml CONTENT-LENGTH: xxxx ?xml version="1.0"> <Create -Job xmins="urn:www- ****** -co-ip"> <request> (operation-attributes) (job-id)123-123-123-123(/job-id) lob-template/> ⟨data/X/data⟩ (request) </Create-Job> (B) 《応答 HTTP/1,1 200 OK CONTENT-TYPE: text/xml CONTENT-LENGTH: xxxx <operation>Start-Job <statusXX/status> </response> </Create-Job>




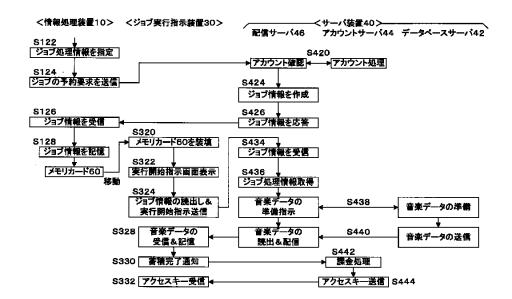


(14)

```
(A)
                                                                                         (A)
   >>字求
                                                                                            >>要求
   POST /music-delivery/id-123456789 HTTP/1,1
                                                                                            POST /printer HTTP/1,1
   HOST: 192,168,0,1:2345
                                                                                            HOST: 192,168,0,1:1234
  DATE: Wed, 06 Dec 2000 20:08:37 GMT CONTENT-TYPE: text/xml CONTENT-LENGTH: xxxxx
                                                                                            DATE: Wed, 06 Dec 2000 20:08:37 GMT
                                                                                           CONTENT-TYPE: text/xml
CONTENT-LENGTH: xxxx
   ?xml version="1,0">
                                                                                            ⟨?xml version="1,0">
   <Create-Job xmins="urn:www- **** -co-jp:print">
                                                                                            (Create -Job xmins="um:www- ****** -co-jp")
       <operation>Deliver-Music</operation>
       (operation-attributes)
                                                                                                 (operation)Start-Job(/operation)
          ⟨job-name⟩my muskc⟨/job-name⟩
                                                                                                  (operation-attributes)
          <document-format>audio/mpeg</document-format>
                                                                                                     (job-ld)123-123-123-123(/job-ld)
       (/operation-attributes)
                                                                                                  ⟨operation-attributes⟩

<job-template uri="http://www.teplates.or.jp/your-order.xml" />
                                                                                                 (job-template/)
       (requesting-user-name)
                                                                                                 (data/>
          on=ohtake- shin, o=******, c=jp
                                                                                               <request>
       </requesting-user-name>
                                                                                            </Create-Job>
   </Create-Job>
                                                                                        (B)
(B)
                                                                                            《応答
                                                                                           HTTP/1.1 200 OK
CONTENT-TYPE: text/xml
CONTENT-LENGTH: xxxx
   《亦答
  HTTP/1,1 200 OK
   CONTENT-TYPE: text/xml
                                                                                            <Oreate - Job xmins="um/www- ******* -co-jp">
   CONTENT-LENGTH: xxxx
                                                                                               (response)
   <Create-Job xmins="urn:www- ****** -co-jp">
                                                                                                   <operation>Start-Job</operation>
      <response>
                                                                                                   (status)OX/status>
          <operation> Deliver-Music</operation>
                                                                                                   (data)xxxxxxx(data)
          <statusXX/statusX
                                                                                               </response>
          (job-ld)123-123-123(/job-ld)
                                                                                           </Create-Job>
          (expires) 7 March 2001(expires)
      (/response)
   </Create-Job>
```

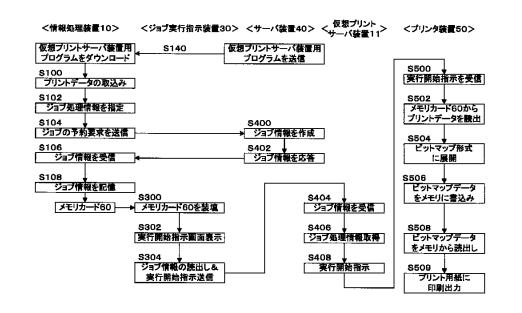

(15) —

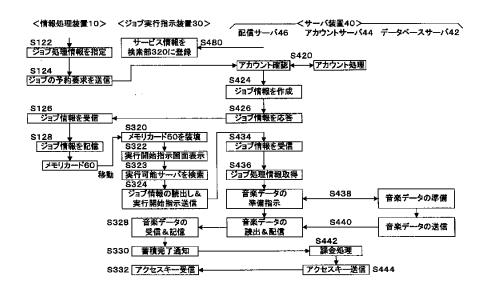

(2C087 AB05 BA02 BA03 BA14 BC12 DA13 5B021 AA01 BB01 CC05 DD19 5B035 BB09 BC03 CA29 5B058 CA25 KA02 KA04 KA08 YA18 YA20 5B085 BG07 CC00